

LAW OFFICES
SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC

2100 PENNSYLVANIA AVENUE, N.W.
WASHINGTON, D.C. 20037-3202
TELEPHONE (202) 293-7060
FACSIMILE (202) 293-7860

CALIFORNIA OFFICE

1010 EL CAMINO REAL
MENLO PARK, CA 94025
TELEPHONE (650) 325-5800
FACSIMILE (650) 325-6606

September 30, 1998

JAPAN OFFICE

TOEI NISHI SHIMBASHI BLDG. 4F
13-5 NISHI SHIMBASHI 1-CHOME
MINATO-KU, TOKYO 105, JAPAN
TELEPHONE (03) 3503-3760
FACSIMILE (03) 3503-3756

BOX: PATENT APPLICATION

Assistant Commissioner for Patents
Washington, D.C. 20231

Re: Application of Ju-ha PARK
**METHOD OF ACQUIRING PROGRAM GUIDE INFORMATION, PROGRAM GUIDE METHOD
APPROPRIATE FOR THE SAME, AND PROGRAM GUIDE APPARATUS**
Our Reference: Q51897

Dear Sir:

Attached hereto is the application identified above including the specification, claims and five (5) sheets of drawings. The requisite U.S. Government Filing Fee, executed Declaration and Power of Attorney and Assignment will be submitted at a later date.

The Government filing fee is calculated as follows:

Total Claims	25 - 20 =	5 x \$22 =	\$ 110.00
Independent Claims	4 - 3 =	1 x \$82 =	\$ 82.00
Base Filing Fee	(\$790.00)		\$ 790.00
Multiple Dep. Claim Fee	(\$270.00)		\$ 000.00
TOTAL FILING FEE			\$ 982.00

Priority is claimed from:

Korean Patent Application

98-36628

Filing Date


September 5, 1998

The priority document will be submitted at a later date.

Respectfully submitted,
SUGHRUE, MION, ZINN, MACPEAK & SEAS
Attorneys for Applicant(s)

By: Darryl Mexic
Darryl Mexic
Reg. No. 23,063

DM:rtw

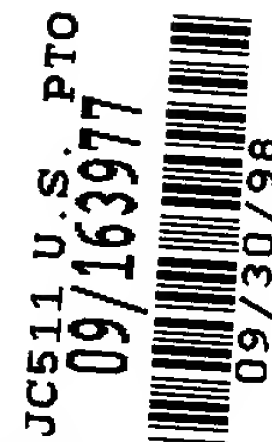

LAW OFFICES
SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC

2100 PENNSYLVANIA AVENUE, N.W.
WASHINGTON, D.C. 20037-3202
TELEPHONE (202) 293-7060
FACSIMILE (202) 293-7860

JC511 U.S. PTO
09/163977
09/30/98

CALIFORNIA OFFICE

1010 EL CAMINO REAL
MENLO PARK, CA 94025
TELEPHONE (650) 325-5800
FACSIMILE (650) 325-6606

September 30, 1998

JAPAN OFFICE

TOEI NISHI SHIMBASHI BLDG. 4F
13-5 NISHI SHIMBASHI 1-CHOME
MINATO-KU, TOKYO 105, JAPAN
TELEPHONE (03) 3503-3760
FACSIMILE (03) 3503-3756

PATENT APPLICATION

Assistant Commissioner for Patents
Washington, D.C. 20231

Re: Application of Ju-ha PARK
**METHOD OF ACQUIRING PROGRAM GUIDE INFORMATION, PROGRAM GUIDE METHOD
APPROPRIATE FOR THE SAME, AND PROGRAM GUIDE APPARATUS**
Our Reference: Q51897

Dear Sir:

Attached hereto is the application identified above including the specification, claims and five (5) sheets of drawings. The requisite U.S. Government Filing Fee, executed Declaration and Power of Attorney and Assignment will be submitted at a later date.

The Government filing fee is calculated as follows:

Total Claims	25 - 20 =	5 x \$22 =	\$ 110.00
Independent Claims	4 - 3 =	1 x \$82 =	\$ 82.00
Base Filing Fee	(\$790.00)		\$ 790.00
Multiple Dep. Claim Fee	(\$270.00)		\$ 000.00
TOTAL FILING FEE			\$ 982.00

Priority is claimed from:

Korean Patent Application

98-36628

Filing Date

September 5, 1998

The priority document will be submitted at a later date.

Respectfully submitted,
SUGHRUE, MION, ZINN, MACPEAK & SEAS
Attorneys for Applicant(s)

By: Darryl Mexic
Darryl Mexic
Reg. No. 23,063

DM:rtw

METHOD OF ACQUIRING PROGRAM GUIDE INFORMATION, PROGRAM GUIDE METHOD APPROPRIATE FOR THE SAME, AND PROGRAM GUIDE APPARATUS

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a method of acquiring program guide information in an image signal receiving apparatus, and a method and apparatus for guiding a program using the same.

2. Description of the Related Art

Generally, program information of a conventional analog TV broadcast is supplied to publications such as newspapers, TVs, magazines, etc. However, in a digital multichannel broadcast, tens to hundreds of channels are provided, so that a selection scope of viewers becomes wider and simultaneously program selection is significantly complicated.

In such a digital broadcast, an electronic program guide (EPG) providing a program list or information on the content of each program is being introduced as a fundamental data service.

Current EPG information is transmitted per channel. That is, since the EPG information of a corresponding channel is transmitted per channel, it is difficult to obtain the EPG information of all channels capable of being accessed.

To be more specific, the EPG information of a current received channel can be obtained by interpreting control information included in a transport packet received. However, in order to acquire EPG information of all channels capable of being accessed, a user must tune all channels individually.

In the digital broadcast, many more channels are provided than in the analog broadcast, and each channel can include subchannels. Therefore, it is important to swiftly interface the EPG information of each channel to a user.

SUMMARY OF THE INVENTION

To solve the above problems, it is an objective of the present invention to provide a method of acquiring useful EPG information.

It is another objective of the present invention to provide a program guide method appropriate for the above method.

It is still another objective of the present invention to provide a program guide apparatus appropriate for the above method.

Accordingly, to achieve the first objective, there is provided a == claim 1.

To achieve the second objective, there is provided a === claim 3, 6.

To achieve the third objective, there is provided a == claim 19.

BRIEF DESCRIPTION OF THE DRAWINGS

The above objectives and advantages of the present invention will become more apparent by describing in detail a preferred embodiment thereof with reference to the attached drawings in which:

FIG. 1 is a block diagram illustrating the configuration of a general DTV receiver;

FIG. 2 is a flowchart illustrating a method of acquiring program guide information, according to the present invention;

FIG. 3 is a flowchart illustrating a program guide method according to the present invention;

FIGS. 4A through 4C show a program list displayed on a screen in the method shown in FIG. 3;

FIG. 5 is a block diagram illustrating an embodiment of a program guide apparatus according to the present invention; and

FIG. 6 is a block diagram illustrating another embodiment of a program guide apparatus according to the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Channel numbers, channel names, program names, schedules, etc. generally transmitted as data are displayed on a TV screen as a program list having a time axis and a channel axis by EPG software of a receiver. A user can perform operations such as tuning or programming in the program list by manipulating a cursor.

FIG. 1 is a block diagram showing the configuration of a conventional digital multichannel TV (hereinafter, called "DTV") receiver. In FIG. 1, a tuner 102 tunes a radio frequency (RF) channel from received broadcast signals via an antenna 100 under the control of a microprocessor 124. The tuner 102 outputs an intermediate frequency (IF) signal of the tuned channel, and an IF module 104 outputs a baseband signal of the tuned channel to a channel decoder 106.

The channel decoder 106 channel-decodes the baseband signal received from the IF module 104 and reproduces data bit lines. Each of the reproduced data bit lines is divided into audio data, video data, and additional data by a transport stream (TS) decoder 108.

The audio data is applied to an audio decoder 110 and decoded according to an MPEG standard or dolby AC-3 standard by the audio decoder 110. The audio data is processed by an audio processing and output unit 112 and output as sound through a speaker 114.

The video data is applied to a video decoder 116, decoded according to the MPEG standard, applied to an on-screen-display (OSD) mixer 118, mixed with OSD data generated by the microprocessor 124, processed by a video processing and outputting unit 120, and output on the screen of a picture tube 122. Here, the OSD data is used for the microprocessor 124 to display various information as graphics or text on a screen.

The additional data is applied to the microprocessor 124. The microprocessor 124 extracts program guide information or other information and stores the extracted information in a memory unit 126. Typical EPG information is stored in a nonvolatile memory such as an EEPROM or a flash ROM.

A key pad 130 and an infra red (IR) receiving unit 134 are connected to the microprocessor 124 which is a control unit of a DTV receiver, via a user interface 128. The microprocessor 124 performs operations depending on various operation commands received from an IR remote controller 132 via the keypad 130 and the IR receiving unit 134, according to a program stored in the memory 126. Here, the IR remote controller 132 can be a wireless mouse such as an air mouse, a remote controller, etc.

A command from the IR remote controller is received as an IR signal by the IR receiving unit 134, and applied to the microprocessor 124 via the user interface

128. Also, the additional data from the TS decoder 108 is applied to the microprocessor 124. Here, the additional data includes program specific information (PSI) as a table with respect to program associated information prescribed in MPEG-2, and the aforementioned EPG information.

5 The memory unit 126 includes a ROM for storing the program of the microprocessor 124, a RAM for temporarily storing data created during the program execution in the microprocessor 124, and an electrically erasable and programmable ROM (EEPROM) for storing various reference data.

10 The microprocessor 124 is connected via a bus 136 to the tuner 102, the IF module 104, the channel decoder 106, the TS decoder 108, the audio decoder 110, the audio processing and outputting unit 112, the video decoder 116, the OSD mixer 118, the video process and output unit 120, and the memory unit 126.

15 In the apparatus shown in FIG. 1, while a user selects and receives a channel, the microprocessor 124 detects EPG information from the additional data provided by the TS decoder 108. EPG information of a corresponding channel is stored in the memory unit 126, and provided to a user in a program guide mode.

20 Since the EPG information is transmitted separately for each channel, EPG information of a corresponding channel cannot be acquired if that channel is not tuned.

25 Thus, a program list for all channels cannot be provided in the program guide mode for guiding a program list for each channel to a user.

In the present invention, while a program of a channel tuned by the tuner 102 is not displayed, for example, while a user selects or programs a program with reference to EPG information displayed on a screen or views line input, an accessible channel is scanned in a background operation, to obtain the EPG information.

FIG. 2 is a flowchart showing a method of obtaining program guide information according to the present invention, which shows an example of obtaining EPG information in a program guide mode

30 When a program guide command is input from a user via the keypad 130, the apparatus shown in FIG. 1 enters into a program guide mode. In the program guide mode, first, all channels capable of being accessed by the tuner 102 are scanned to obtain program guide information for each channel, in step S200. The

microprocessor 124 controls the tuner 102 to scan as many channels as possible, and detects the program guide information for each channel from additional data introduced via the tuner 102. Here, the accessible channels include not only the channels capable of being accessed by the tuner 102 but also line input.

5 Obtained EPG information is stored, in step S202.

The obtained EPG information is stored in the memory unit 126. The EPG information is transmitted for each channel, so that the microprocessor 124 acquires EPG information of a corresponding channel whenever a channel is changed and stores the acquired EPG information to the memory unit 126.

10 According to the method of FIG. 2, when the program guide mode begins, program guide information with respect to all the accessible channels is acquired all at once in an initial stage. Thus, it takes a lot of time to display the program guide information.

15 An increase in the number of accessible channels requires a longer time to display the program guide information, and causes the user inconvenience. In particular, a digital broadcast provides tens or hundreds of channels, thus requiring a lot of time to acquire the EPG information of all channels.

20 To solve this problem, in the present invention, the EPG information of a prior channel among prioritized channels is obtained first of all, and the EPG information of a channel having the lowest priority is then obtained, thereby accomplishing smooth user interface.

25 The priority of channel search is determined by the distance (interval) between channels tuned before a program guide command is applied, or by a probability distribution of channels, i.e., the accumulation of the number of times which channels are selected.

A typical user searches using a channel up/down command, so it is natural for the user to search from channels included in a currently-displayed program list and their close channels.

30 Here, the close channels include upper close channels and lower close channels, and it is preferable to determine by default which channel among the above close channels is to be accessed first.

Also, it is necessary to change the direction of search according to the characteristics of a user, even if the search direction is determined by default. For

example, even if the default search direction is set to be upward, once the user designates a channel down button, lower channels must be preferentially searched. It is preferable that in preparation for when a user changes the search direction in the middle, a channel search direction is determined referring to a channel up/down command or page up/down command received just before determining a search channel.

FIG. 3 is a flowchart illustrating a program guide method according to a preferred embodiment of the present invention. Response must be preferentially considered in the interface with a user. It is considered that good response is provided if a system quickly responds to a command input by a user. The response is not considered good if a user must wait until program guide information for all channels is obtained after inputting the program guide command.

However, the user immediately needs a channel viewed before the program guide command is applied, and program guide information of several channels adjacent to the channel viewed, not the program guide information for all channels.

In the present invention, the channel viewed before the program guide command is applied, and the program guide information of several channels adjacent to the above channel are acquired first of all and displayed to the user, thereby improving the response.

Also, channels adjacent to channels displayed in preparation for the channel search by a user are first searched, and far channels are then gradually searched, thus obtaining the program guide information on accessible channels.

First, it is detected whether program guide information of a channel tuned before a program guide command is applied is effective, in step S300.

Generally, a user applies a program guide command while receiving the program of a channel. The EPG information of a channel is automatically obtained while that channel is tuned, so that at least the program guide information of the channel tuned before the program guide command is applied can be considered effective.

In a display step S310, at least a program list of channels tuned before the program guide command is applied among stored EPG information is displayed.

The microprocessor 124 writes a program list including channels tuned before the program guide command is applied among EPG information stored in the memory unit 126, and provides the program list to the OSG mixer 118. The OSG mixer 118 converts the program list provided by the microprocessor 124 into a character signal, and displays the character signal on a screen.

FIG. 4A shows the contents displayed on a screen as the result of the step S310. In FIG. 4A, reference numeral 400 is a screen, reference numeral 410 is a program list, reference numeral 420 is a cursor, reference numeral 430 is an up/down button, reference numeral 432 is a page up/down button, and reference numeral 440 is a left/right scan button.

The program list 410 lists a program for each channel on channel and time axes. Channels listed in the program list 410 are controlled by the up/down button 430, and time is controlled by the left/right scan button 440.

A user can search for a channel and time of a desired program, using the up/down button 430 and the left/right scan button 440.

Whenever the up/down button 430 is pressed, a selection bar 460 moves between the listed channels. When the selection bar 460 departs from a screen boundary, the content of the program list 410 is renewed so that the next adjacent channel can be displayed.

If program guide information of channels tuned before the program guide command is applied is not effective or not stored, a screen display message like "please wait" or "obtaining program guide information" is displayed to the user, in step S360. If it takes a short time to obtain the program guide information of the tuned channel, this message display step may be omitted.

Then, program guide information of channels tuned before a program guide command is applied is obtained, in step S360. A program list including this program guide information is displayed, in step 310.

In a program guide information acquiring step S320, program guide information for each channel is obtained by scanning accessible channels via the tuner 102 while a user views displayed EPG information.

To be more specific, in the program list shown in FIG. 4A, an inverted channel number in a program list 360 of a channel No. 53 indicates that channel No. 53 was viewed before a program guide mode.

In the circumstances where the program list as shown in FIG. 4A is displayed, channels are searched to obtain EPG information, in the following sequence.

If a channel No. 52 and a channel No. 54 are channels listed closest to a channel No. 53, i.e., channels most adjacent, they have the highest preference.

If a channel No. 51 and a channel No. 56 are channels listed next closest to the channel No. 53, they have the next highest preferences after the channels No. 52 and No. 54.

If an upward search direction is determined by default, channels are searched for in the sequence of No. 53, to No. 52, to No. 54, No. 51, and No. 56.

EPG information for each channel is stored in the memory unit 126 as soon as it is obtained, and the microprocessor 124 writes a new program list referring to this information and provides the new program to the OSG mixer 118, in steps S330 and S340. As a result, new program lists as shown in FIGS. 4B and 4C are sequentially displayed.

The sequence in which the EPG information is listed in the memory unit 126 is determined by a typical channel number. Also, when a channel has subchannels, the subchannels are listed after the main channel.

Accordingly, the microprocessor 124 already knows the listing sequence of the EPG information stored in the memory unit 126, and also knows the channel viewed before the program guide mode, to determine the search sequence.

The sequence for searching for channels may not be determined according to adjacency. For example, channels may be searched for upward or downward based on the channel viewed before the program guide mode. However, considering response to the user, it is more proper that the channel search sequence be determined according to the adjacency between channels.

The channel search sequence may be changed by the search inclination of a user. For example, if a user manipulates the channel up/down button 430 referring to a screen shown in FIG. 4C, continuous search in a direction to be indicated later can be expected. Thus, when a channel up operation is indicated, the channel search operation may be limited to upper channels.

The channel search sequence can be determined referring to past viewing tendencies of users. This determines the probability that a channel is to be tuned

based on the accumulated frequency of channels tuned by a user. A channel having a higher probability is searched for earlier.

In a storing step S330, the obtained EPG information is stored in the memory unit 126. Here, the obtained program guide information can be renewed only when there is a difference between the obtained program guide information and program guide information stored in the memory unit 126.

The obtained EPG information is stored in the memory unit 126. Since the EPG information is transmitted by channels, the microprocessor 124 acquires EPG information of a corresponding channel whenever a channel is changed, and stores the acquired EPG information in the memory unit 126.

A program list is displayed, in step S340.

The microprocessor 124 accesses the program guide information stored in the memory unit 126 to generate the program list as shown in FIGS. 4A through 4C. The program list generated by the microprocessor 124 is displayed on a screen via the OSG mixer 118.

The program list is controlled according to a channel up/down command or page up/down command from a user, and when a channel selection command is applied by the user, the program of a selected channel is displayed, in step S350.

According to the program guiding method of the present invention, the longer it takes for a user to refer to the program list, the program guide information of more channels can be obtained. However, the program guide information of channels immediately required by a user can be sufficiently acquired even in a short searching time.

According to the method shown in FIG. 3, while a program is selected referring to the EPG information displayed by a user, accessible channels are scanned in a background operation unnoticeable to a user, thereby obtaining the EPG information. Also, the EPG information is obtained referring to the search direction of a user, thus accomplishing a smooth interface with the user.

Furthermore, in order to obtain the program guide information, the program guide information of a preferential channel is obtained first and provided to a user. Therefore, a user does not need to wait until the program guide information of all the channels is obtained, increasing convenience.

In the program guide method shown in FIG. 3, the program list as shown in FIG. 4C may be displayed in the display step S310. This is the case when a program list including a channel viewed before and channels adjacent to the channel is displayed in the initial stage of a program guiding operation.

According to an advanced television standard committee (ATSC) standard, the EPG information is recommended to be transmitted in a quantity of at least 8 hours to a maximum of 384 hours, at time intervals of 3 hours. Thus, erroneous program guide information is less likely to be displayed if a program guide command is performed within 384 hours at maximum.

Accordingly, it is all right to display the program list including a channel viewed before the program guide mode and several channels adjacent to the channel.

However, a program may be changed by the circumstances of a broadcasting station, or unstored program guide information may be requested. Thus, it is preferable that channels are searched for by the above-described searching method even after the program list including the channel viewed before the program guide mode and several channels adjacent to the channel is displayed, to again obtain a program guide.

Meanwhile, when the program list including the channel viewed before the program guide mode and several channels adjacent to that channel is displayed in the initial stage of the program guide operation, possible erroneous information of some channels can be replaced with correct information by searching for channels using the aforementioned search method.

FIG. 5 is a block diagram illustrating the configuration of a program guide apparatus according to the present invention. As shown in FIG. 5, the apparatus includes a tuner 50, a ROM 52, a program guide information detector 54, a memory 56, a key input unit 58, a microprocessor 60, and an OSD generator 62.

The tuner 50 is tuned to a broadcast signal of a tuned channel. The program guide information detector 54 detects EPG information from the broadcast signal of a channel tuned by the tuner 50. The detected EPG information is stored in the memory 56.

The microprocessor 60 writes a program list from the EPG information stored in the memory 56 according to a program stored in the ROM 52, and

provides the program list to the OSD generator 62. The OSD generator 62 converts the program list written from the EPG information stored in the memory 56 into a character signal to display the program list to a CRT 64.

The microprocessor 60 controls tuning of the tuner 60 in the background operation while the program list is displayed on the CRT 64, i.e., while the viewer does not watch any broadcast program via the tuner, to obtain EPG information of accessible channels.

The microprocessor 60 searches for channels in a programmed channel searching sequence. This channel searching sequence depends on the sequence of channels which are displayed in the program guide mode.

When the channel up/down command is input via the key input unit 58 during channel search, the microprocessor 60 changes the channel searching sequence referring to the input channel up/down command.

When the EPG information is not stored in the memory 56, the microprocessor 60 generates a message of "please wait" or "acquiring guide information". When at least a current channel and current program guide information are obtained, the microprocessor 60 generates a program list corresponding to the stored program guide information.

FIG. 6 is a block diagram illustrating another embodiment of a program guide apparatus according to the present invention. Units shown in FIG. 6 performing the same operations as those in FIG. 5 are referred to by the same reference numerals, and will not be described again. The apparatus of FIG. 6 further comprises a probability estimator 64 in addition to the components of the apparatus of FIG. 5.

The probability estimator 64 accumulates the number of times channels are tuned by a user, and calculates the probability that each channel will be tuned, according to the accumulated value. It can be estimated that the probability of tuning is high as a channel is tuned more often.

The microprocessor 124 determines the order of priority of channel search according to the probability calculated by the probability estimator 64.

In the program guide information acquiring method according to the present invention as described above, while a viewer does not watch the program of any channel tuned in a tuner, program guide information of accessible channels is

obtained in a background operation. Therefore, the program guide information of the accessible channels can be obtained by only a single tuner.

Furthermore, in the program guide method and apparatus according to the present invention, information immediately required by a user is obtained first, and information of less preferential channels is obtained next, thus smoothing the interface with the user.

What is claimed is:

1 1. A method of acquiring program guide information for channels,
2 wherein the program guide information for each channel is acquired by scanning
3 accessible channels while received program is not displayed.

1 2. The method of acquiring program guide information for channels as
2 claimed in claim 1, wherein program guide information of accessible channels is
3 obtained by a tuner while program received by the tuner is not displayed.

1 3. A program guiding method in which a program list for channels is
2 displayed in response to a program guide command, the method comprising the
3 steps of:
4 acquiring program guide information of accessible channels;
5 storing the acquired program guide information;
6 writing a program list on the basis of the stored program guide information;
7 and
8 displaying the written program list to a user.

1 4. The program guiding method as claimed in claim 3, wherein a
2 message for indicating that a user must wait until the program list is written is
3 provided.

1 5. The program guiding method as claimed in claim 3, further
2 comprising the step of determining whether program guide information is effective
3 by comparing a current time to an effective period of stored program guide
4 information, and proceeding to the program list writing step when the stored
5 program is effective, before the step of acquiring program guide information.

1 6. The program guiding method as claimed in claim 3, wherein the step
2 of acquiring the program guide information comprises the substeps of:
3 writing and displaying a program list including program guide information of
4 channels tuned before a program guide command is applied, from the stored
5 program guide information; and

6 acquiring program guide information for each channel by searching for
7 accessible channels in a background operation while the program list is referred
8 to.

1 7. The program guiding method as claimed in claim 3, wherein in the
1 search step, the sequence of accessing channels is determined by the adjacency
2 between channels tuned before the program guide command is applied.

1 8. The program guiding method as claimed in claim 7, wherein in the
2 search step, the order of priority of channels having the same adjacency is
3 determined according to a channel up/down command input before corresponding
4 channels are accessed.

1 9. The program guiding method as claimed in claim 7, wherein an
2 upward or downward direction is preferential when no channel up/down command
3 is applied.

1 10. The program guiding method as claimed in claim 3, wherein in the
2 search step, channels are searched for upward or downward from the channel
3 tuned before the program guide command is applied.

1 11. The program guiding method as claimed in claim 3, further
2 comprising the step of writing a probability distribution of tuned channels, wherein
3 the channels are searched for in the order of priority according to the probability
4 distribution of channels in the search step.

1 12. A program guiding method in which a program list for each channel
2 is displayed in response to a program guide command, the method comprising the
3 steps of:

4 writing and displaying a program list including program guide information of
5 channels tuned before a program guide command is applied, from the stored
6 program guide information;

7 acquiring program guide information for each channel by searching for
8 accessible channels in a background operation while the program list is referred
9 to;

10 storing the acquired program guide information for each channel;
11 rewriting a program list on the basis of the stored program guide
12 information; and
13 displaying the rewritten program list to a user.

1 13. The program guiding method as claimed in claim 12, wherein in the
2 guide information acquiring step, the sequence of accessing channels is
3 determined by the adjacency between channels tuned before the program guide
4 command is applied.

5 14. The program guiding method as claimed in claim 12, wherein the
6 order of priority of channels having the same adjacency is determined according to
7 a channel up/down command input before corresponding channels are accessed.

8 15. The program guiding method as claimed in claim 13, wherein an
9 upward or downward direction is preferential when no channel up/down command
10 is applied.

11 16. The program guiding method as claimed in claim 11, wherein in the
12 guide information acquiring step, channels are searched for upward or downward
13 from the channel tuned before the program guide command is applied.

1 17. The program guiding method as claimed in claim 11, further
2 comprising the step of writing a probability distribution of tuned channels, wherein
3 the channels are searched for in the order of priority according to the probability
4 distribution of channels in the search step.

5 18. The program guiding method as claimed in claim 11, wherein in the
6 display step, when the program guide information of a corresponding channel is
7 not stored, a message screen for indicating "please wait" or "acquiring guide

information" is displayed, and when the program guide information of channels tuned before the program guide command is applied is acquired by the acquiring process, the program guide information of a corresponding channel is displayed.

19. An apparatus for acquiring the program guide information of accessible channels and guiding program guide information acquired in response to a program guide command in a multichannel receiver, the apparatus comprising:

- a tuner for tuning a channel;
- a program guide information detector for detecting program guide information introduced via the tuner;
- a memory for storing the program guide information for each channel detected by the program guide information detector;
- a key input for introducing a user manipulation command such as a program guide command or a channel search command;
- a microprocessor which writes a program list based on program guide information stored in the memory in response to the manipulation command input via the key input and is programmed to search for accessible channels by controlling the tuner in a background operation while a user refers to the program list; and
- a character signal generator for generating a character signal corresponding to the program list written by the microprocessor and providing the character signal to a screen.

20. The apparatus for acquiring and displaying a program guide command as claimed in claim 19, wherein the microprocessor is programmed so that the sequence of accessing channels can be determined by the adjacency between channels tuned before the program guide command is applied.

21. The program guiding apparatus as claimed in claim 20, wherein the microprocessor is programmed so that the order of priority of channels having the same adjacency can be determined according to a user's channel up/down command input via the key input before corresponding channels are accessed.

1 22. The program guiding apparatus as claimed in claim 21, wherein the
2 microprocessor is programmed so that channels can be searched for preferentially
3 in an upward or downward direction when no channel up/down command is
4 applied.

1 23. The program guiding apparatus as claimed in claim 19, wherein the
2 microprocessor is programmed to search for channels upward or downward from
3 the channel tuned before the program guide command is applied.

1 24. The program guiding apparatus as claimed in claim 19, further
2 comprising a probability estimator for calculating the probability that channels are
3 to be selected, by accumulating the number of times which the channels are
4 tuned, wherein the microprocessor is programmed to search for channels in the
5 order of priority according to a probability of tuning by channels calculated by the
6 probability estimator.

1 25. The program guiding apparatus as claimed in claim 19, wherein the
2 microprocessor is programmed so that when the program guide information of a
3 corresponding channel is not stored, a message screen for indicating "please wait"
4 or "acquiring guide information" is written and provided to the character signal
5 generator.

Abstract of the Disclosure

A method of acquiring program guide information in an image signal receiver, and program guide method and apparatus using the same, are provided.

=== claim 19. In the program guide apparatus, information immediately required
5 by a user is obtained first, and information of less preferential channels is obtained next, thus smoothing the interface with the user.

FIG. 1

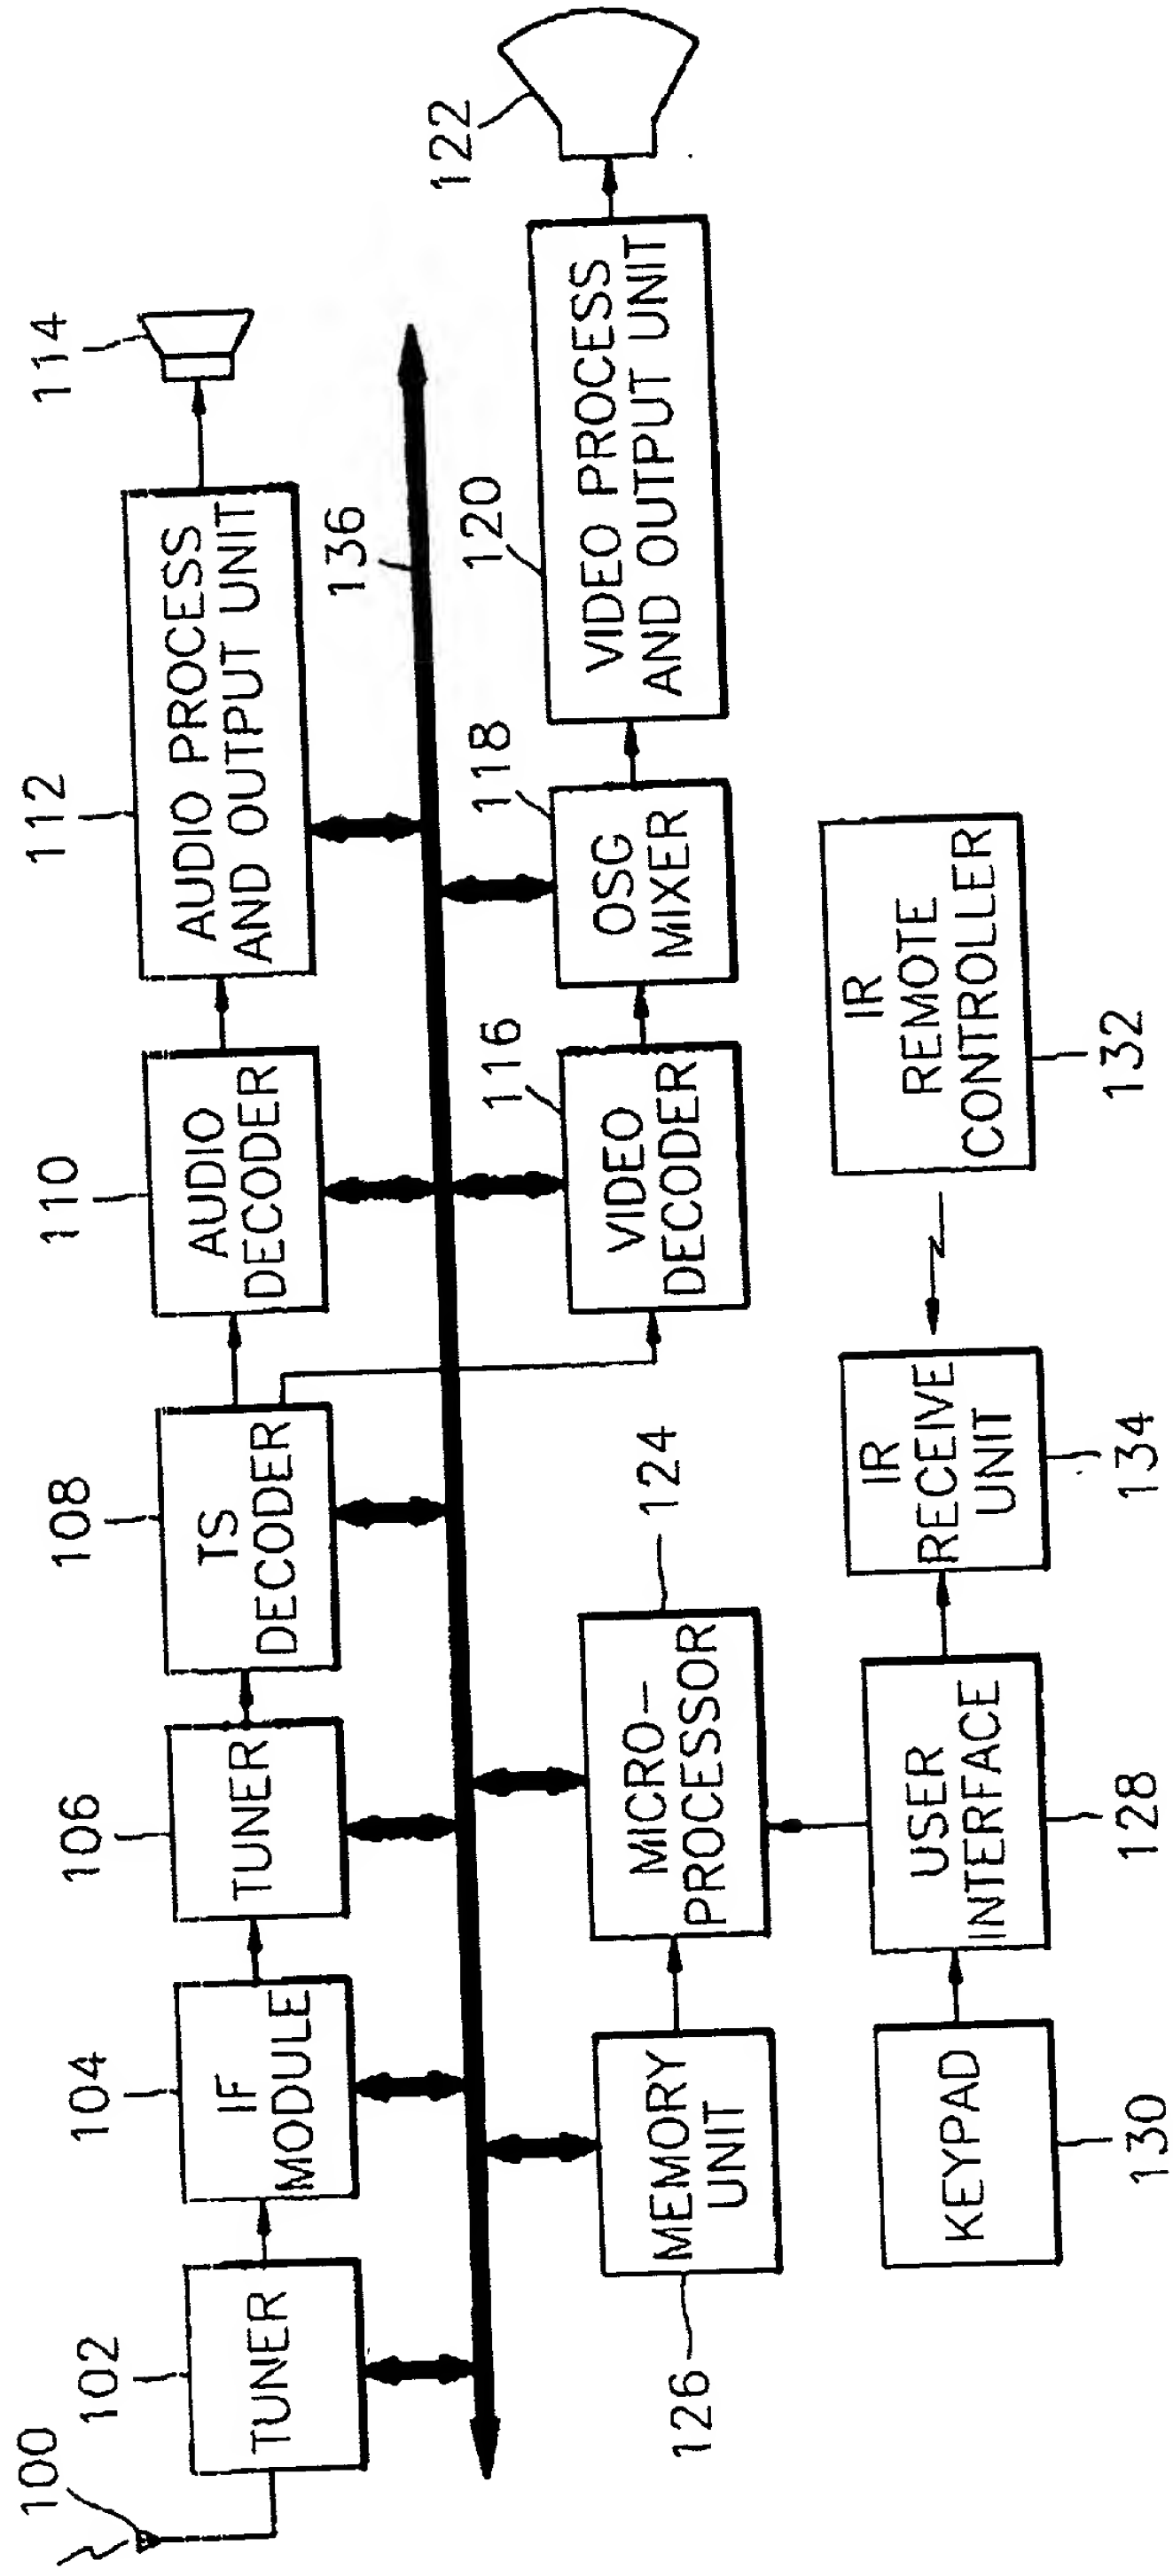


FIG. 2

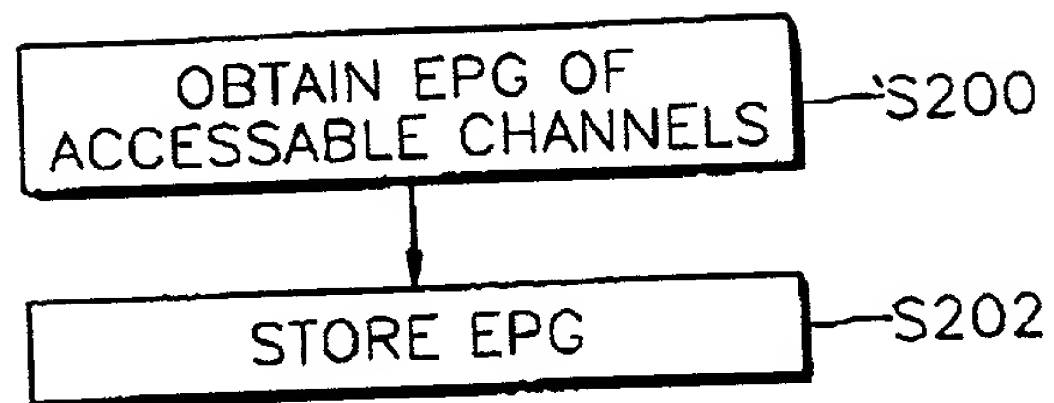


FIG. 3

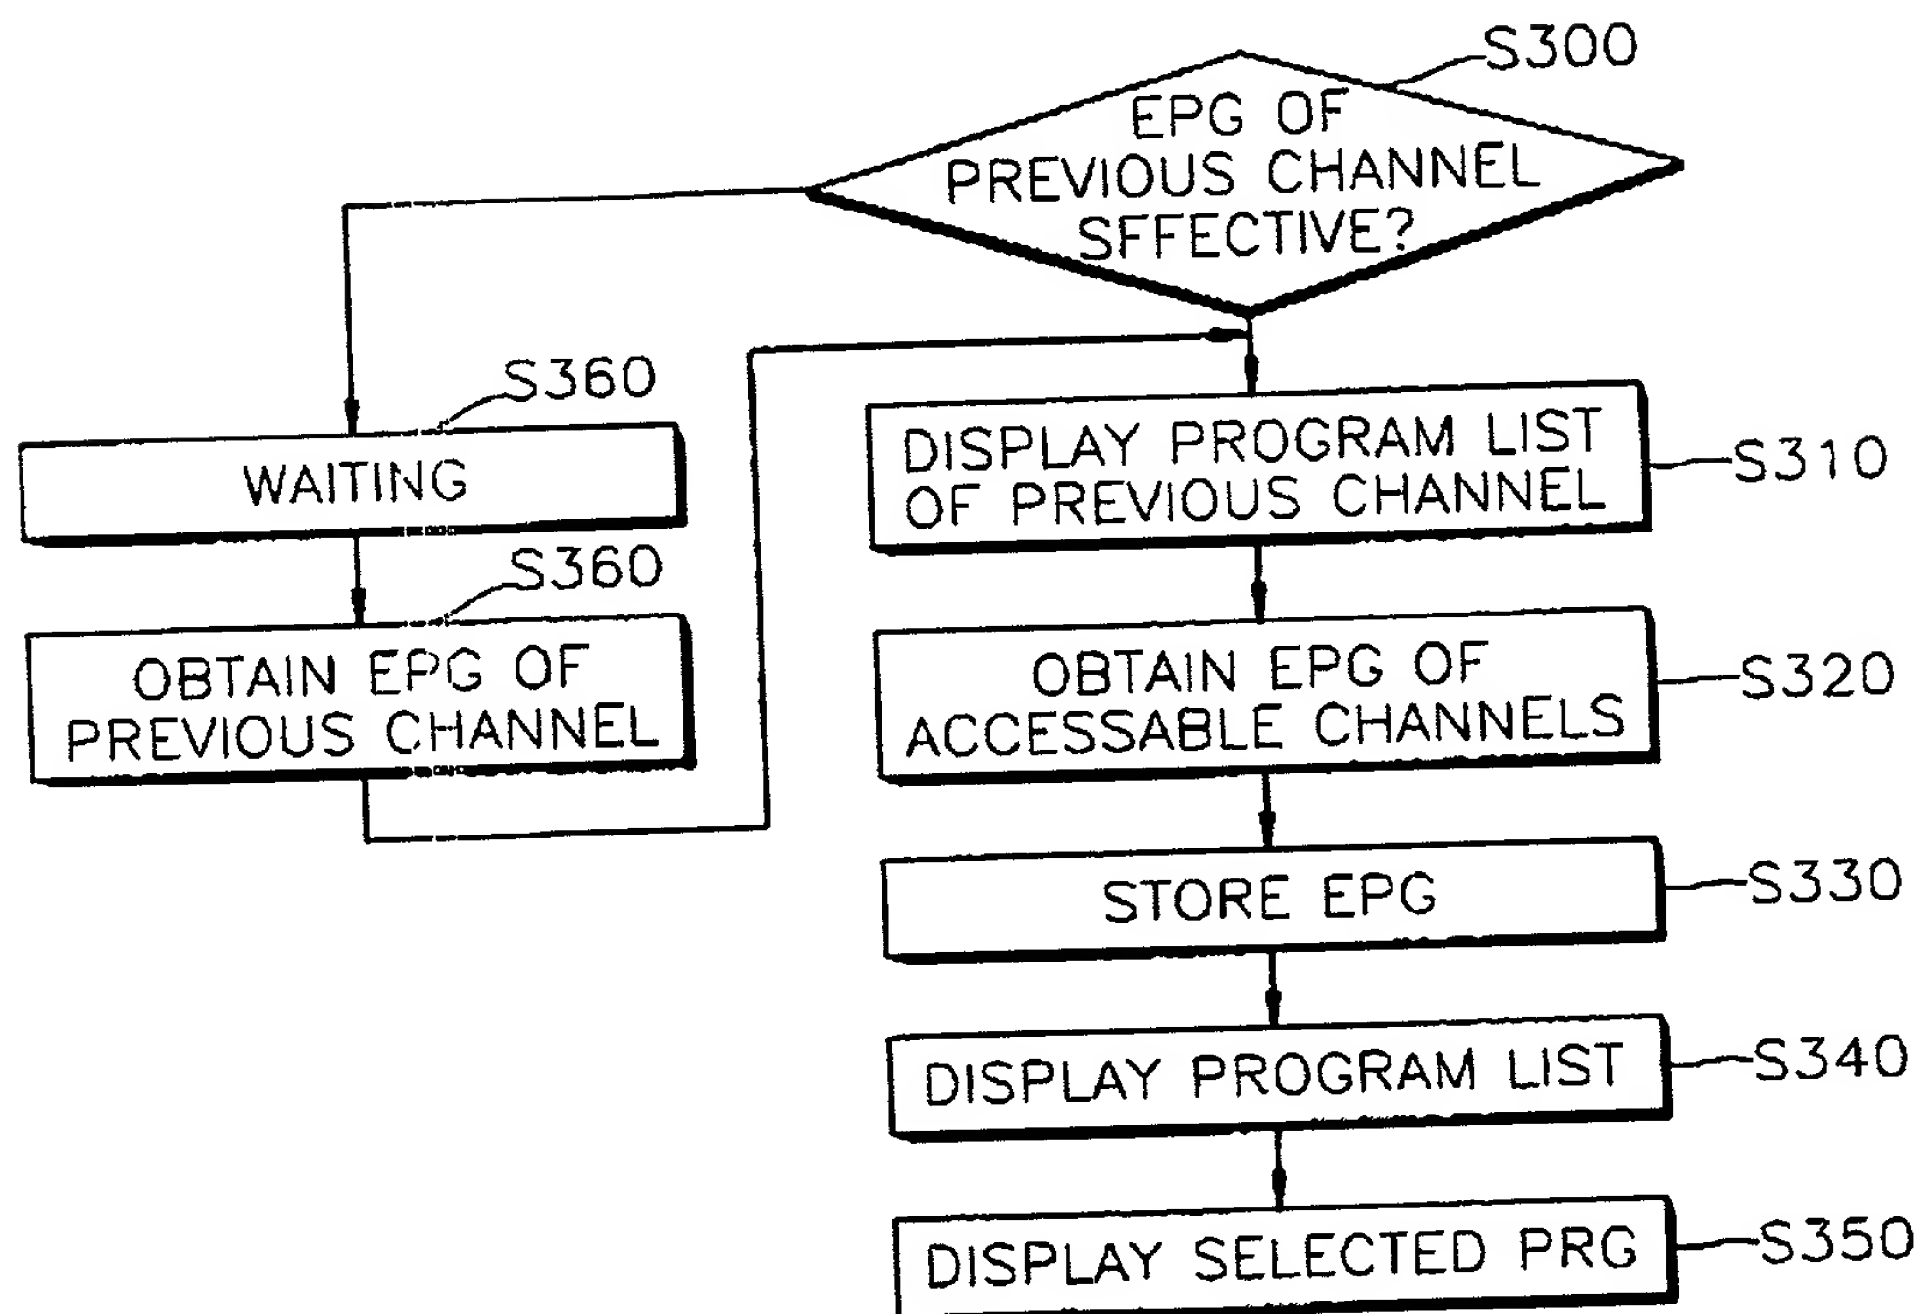


FIG. 4A


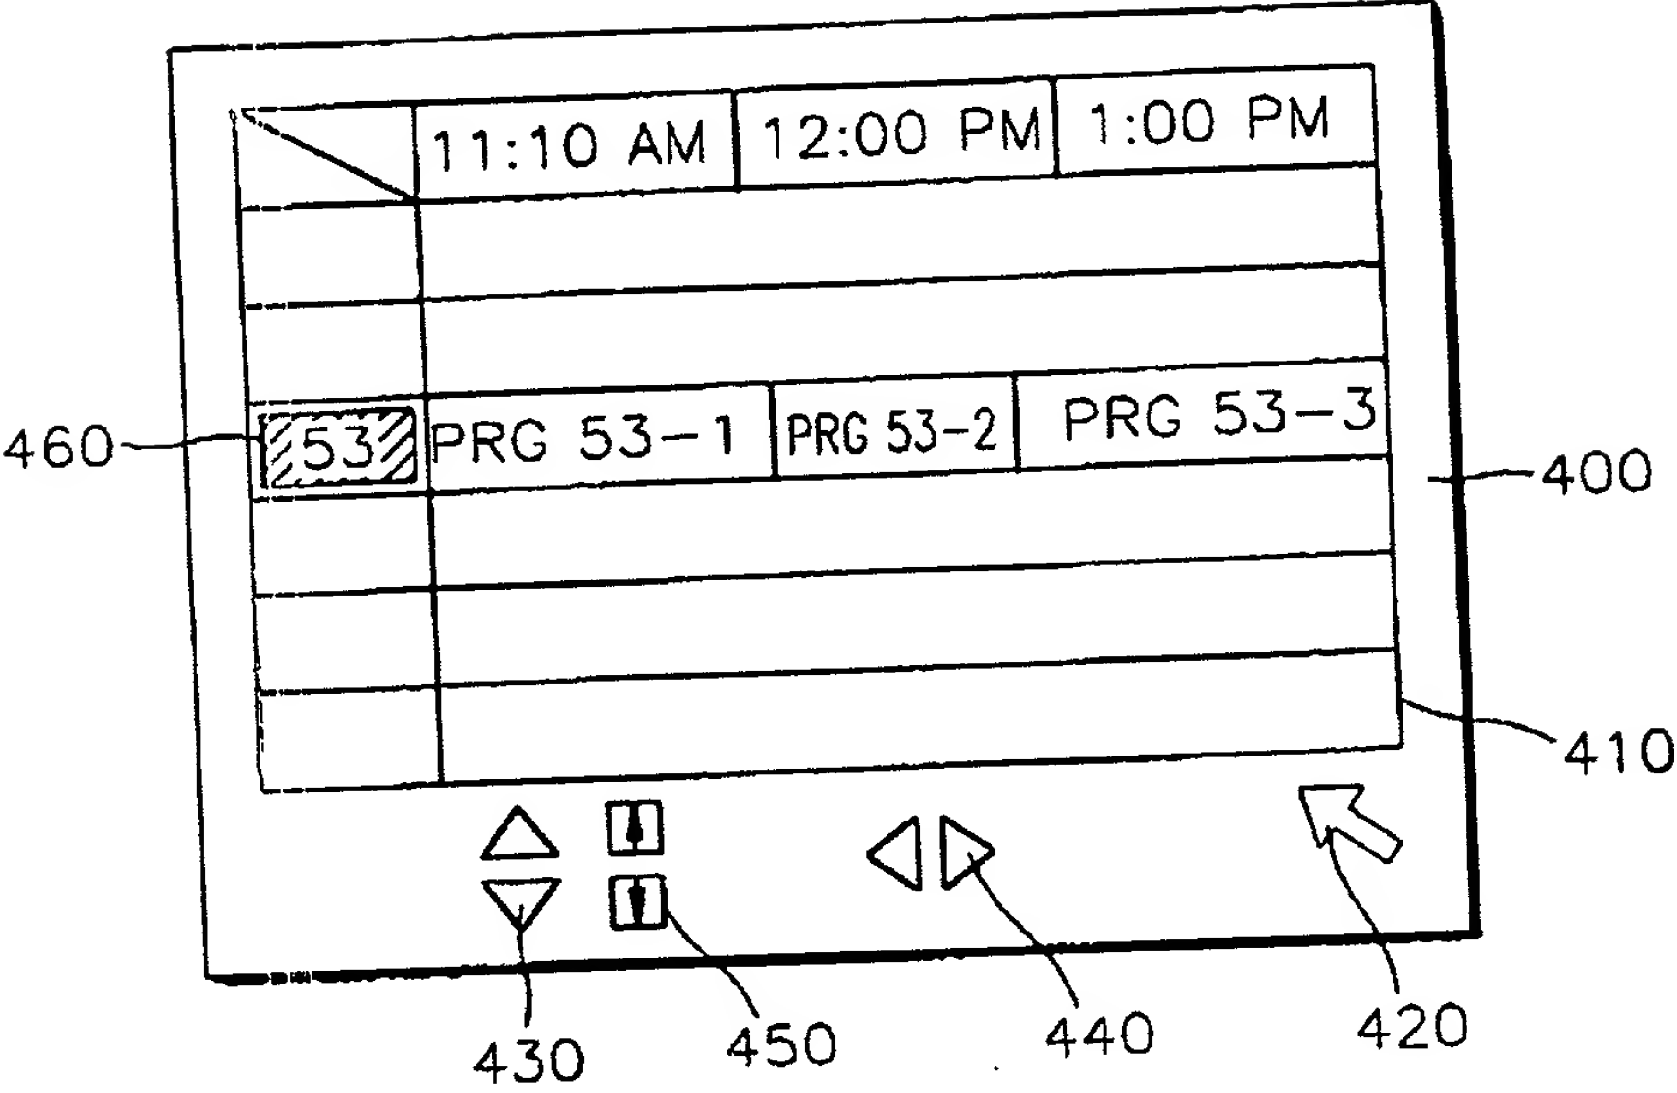


FIG. 4B

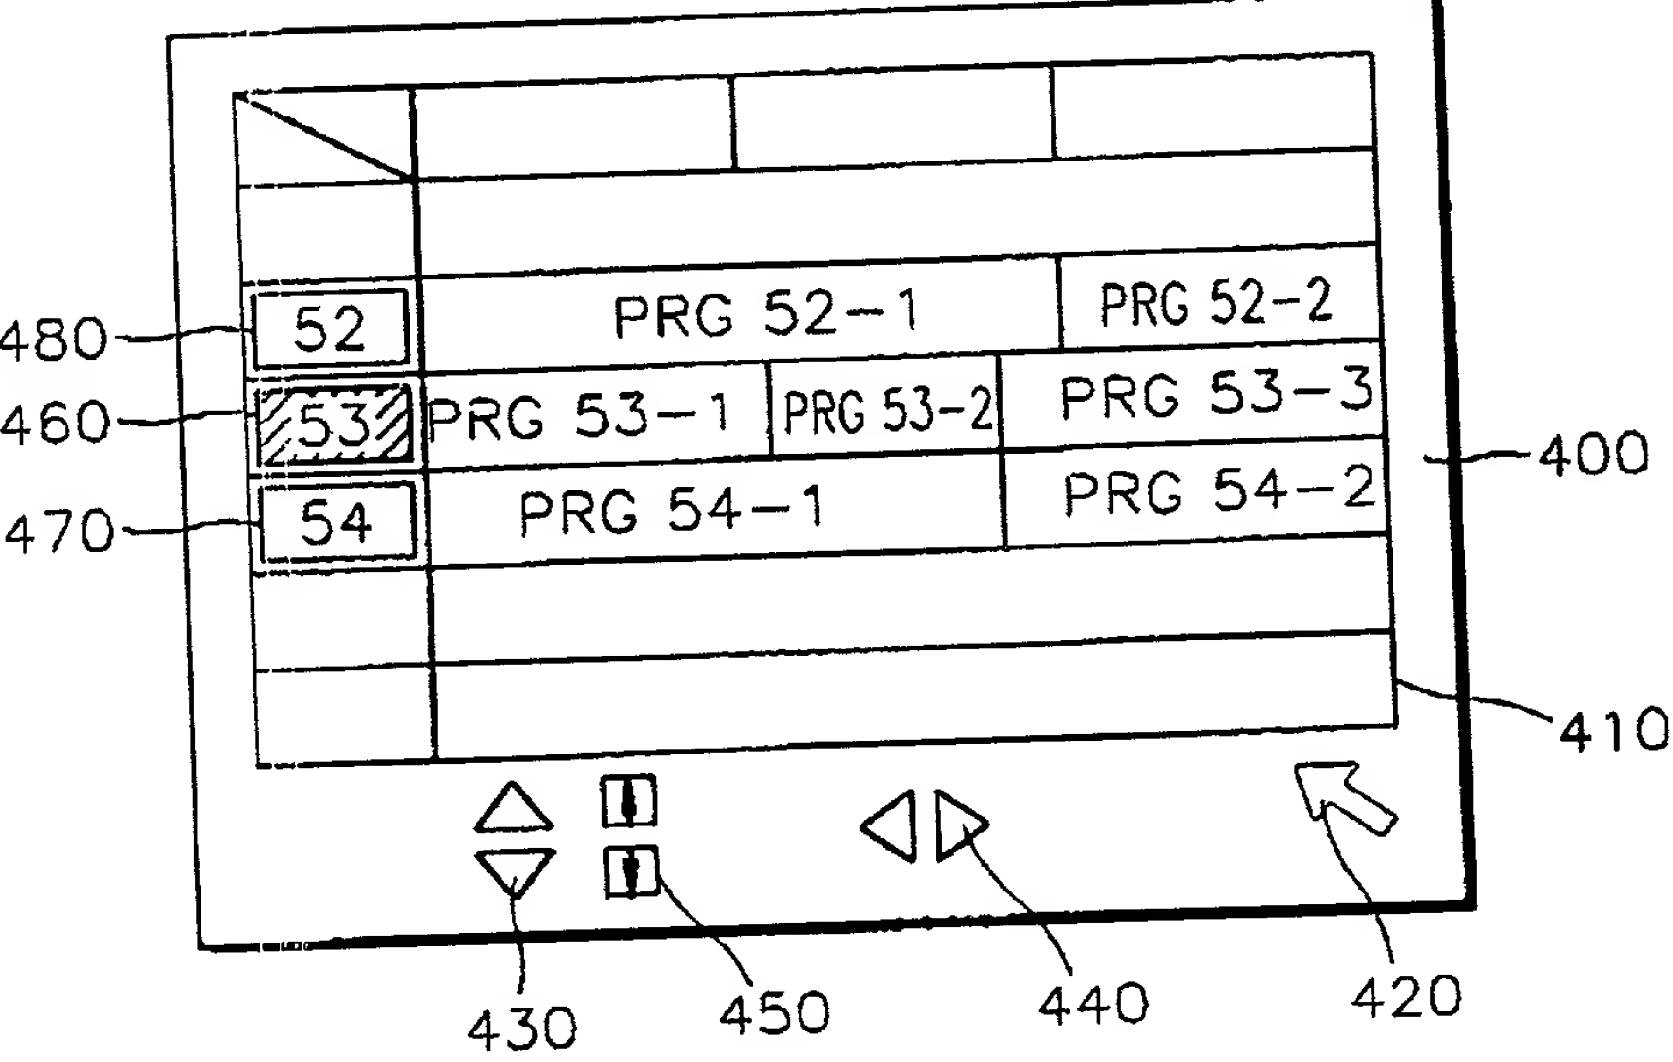

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
3	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
4	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
5	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81																			

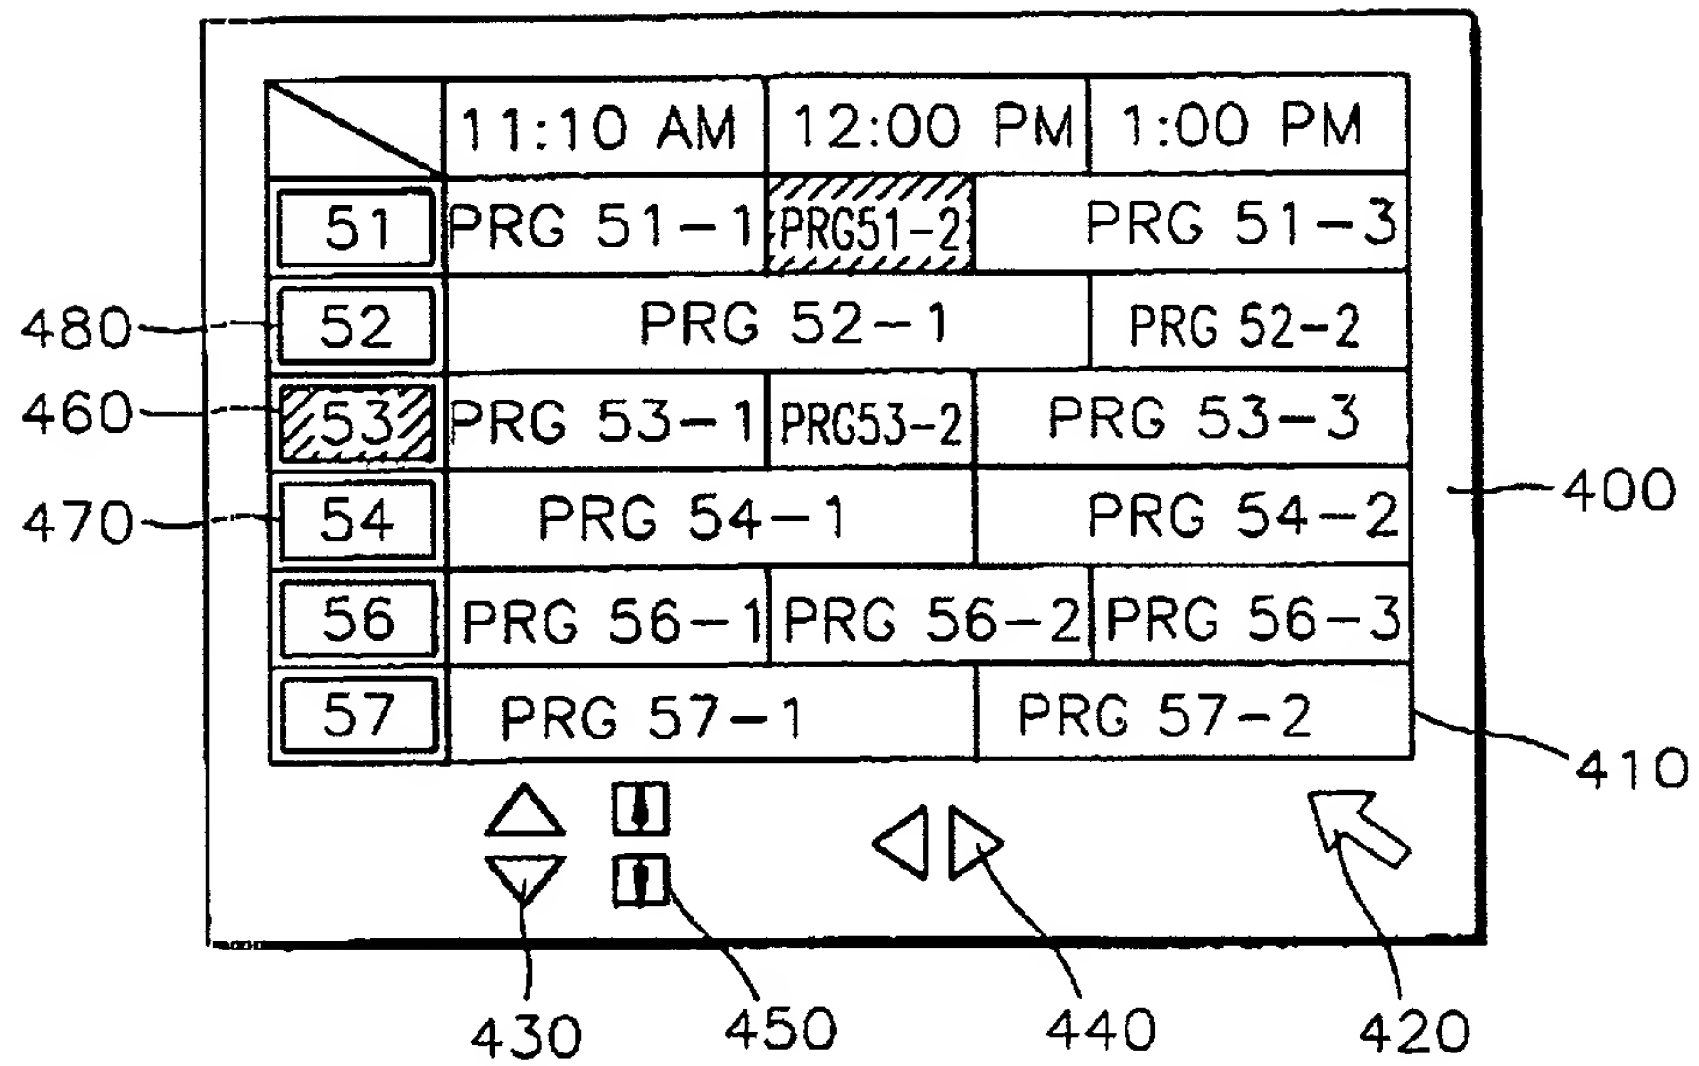


FIG. 5



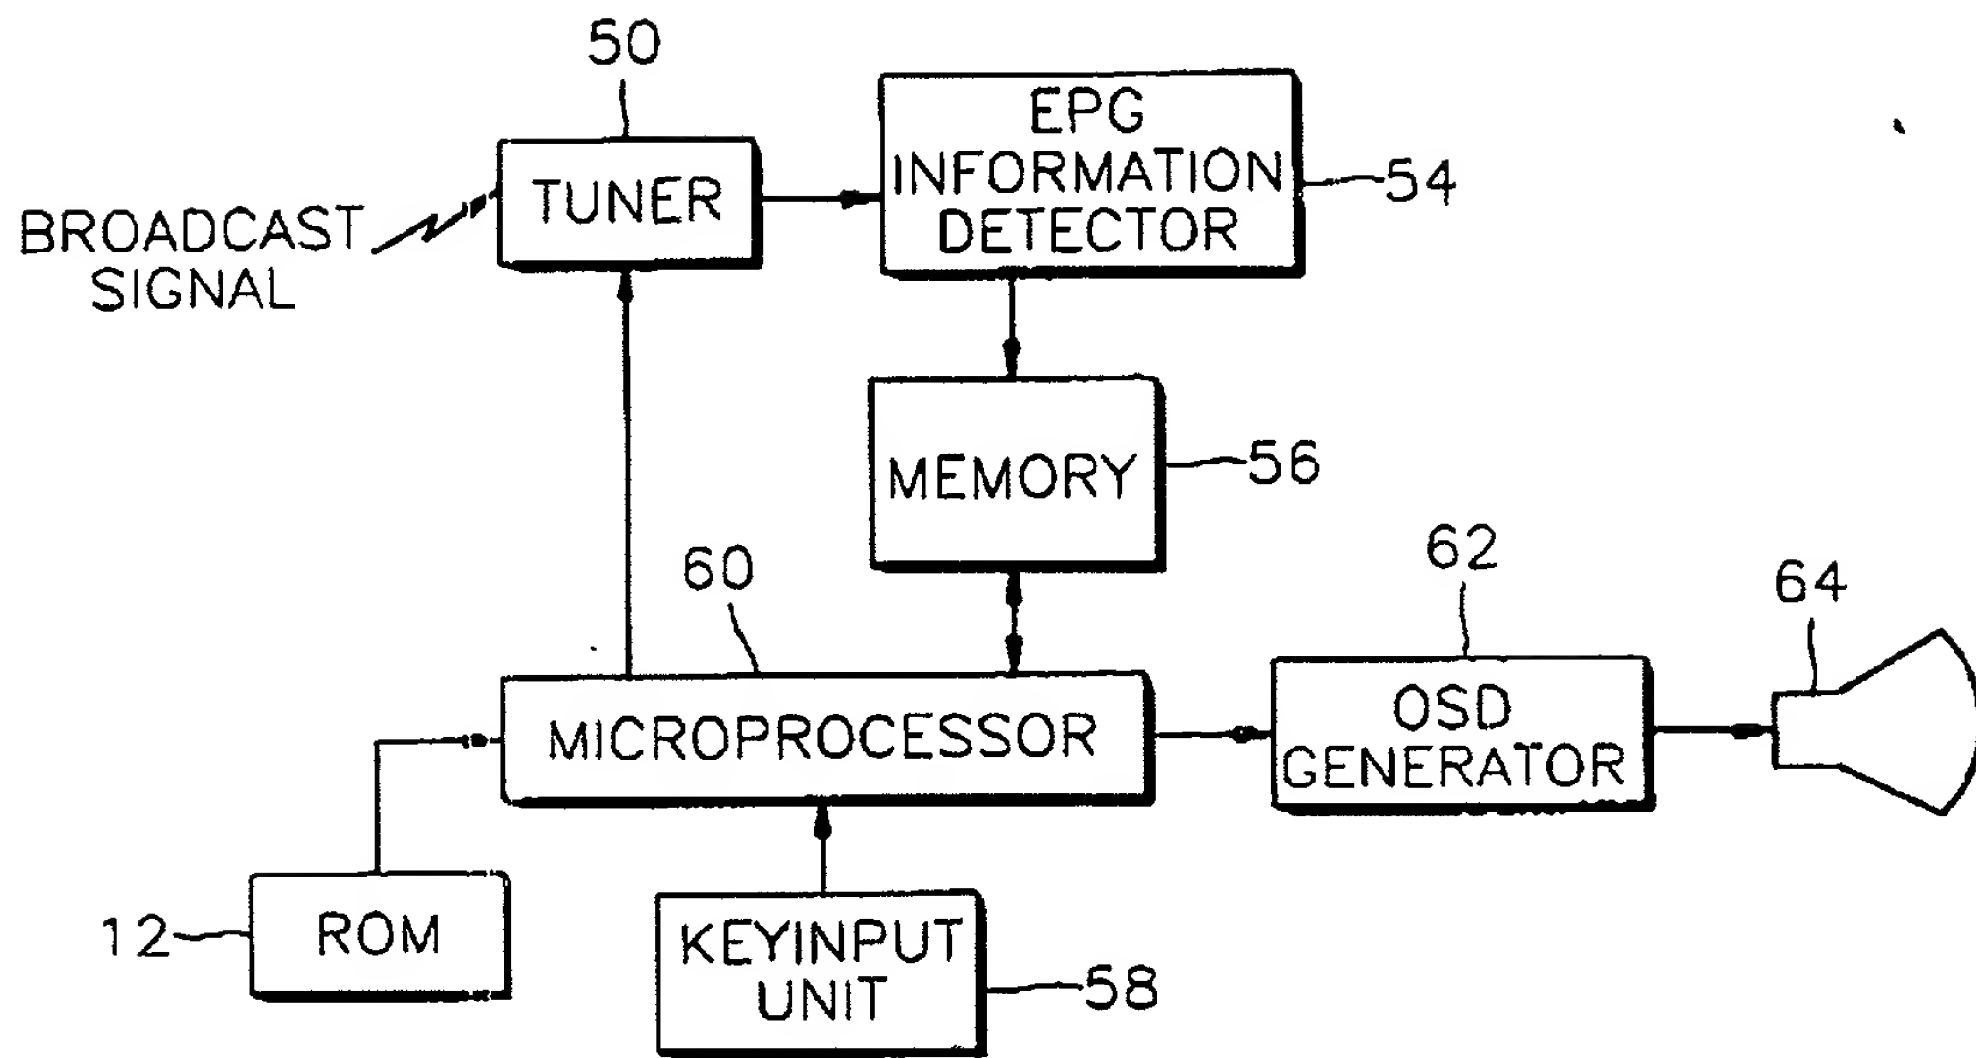


FIG. 6

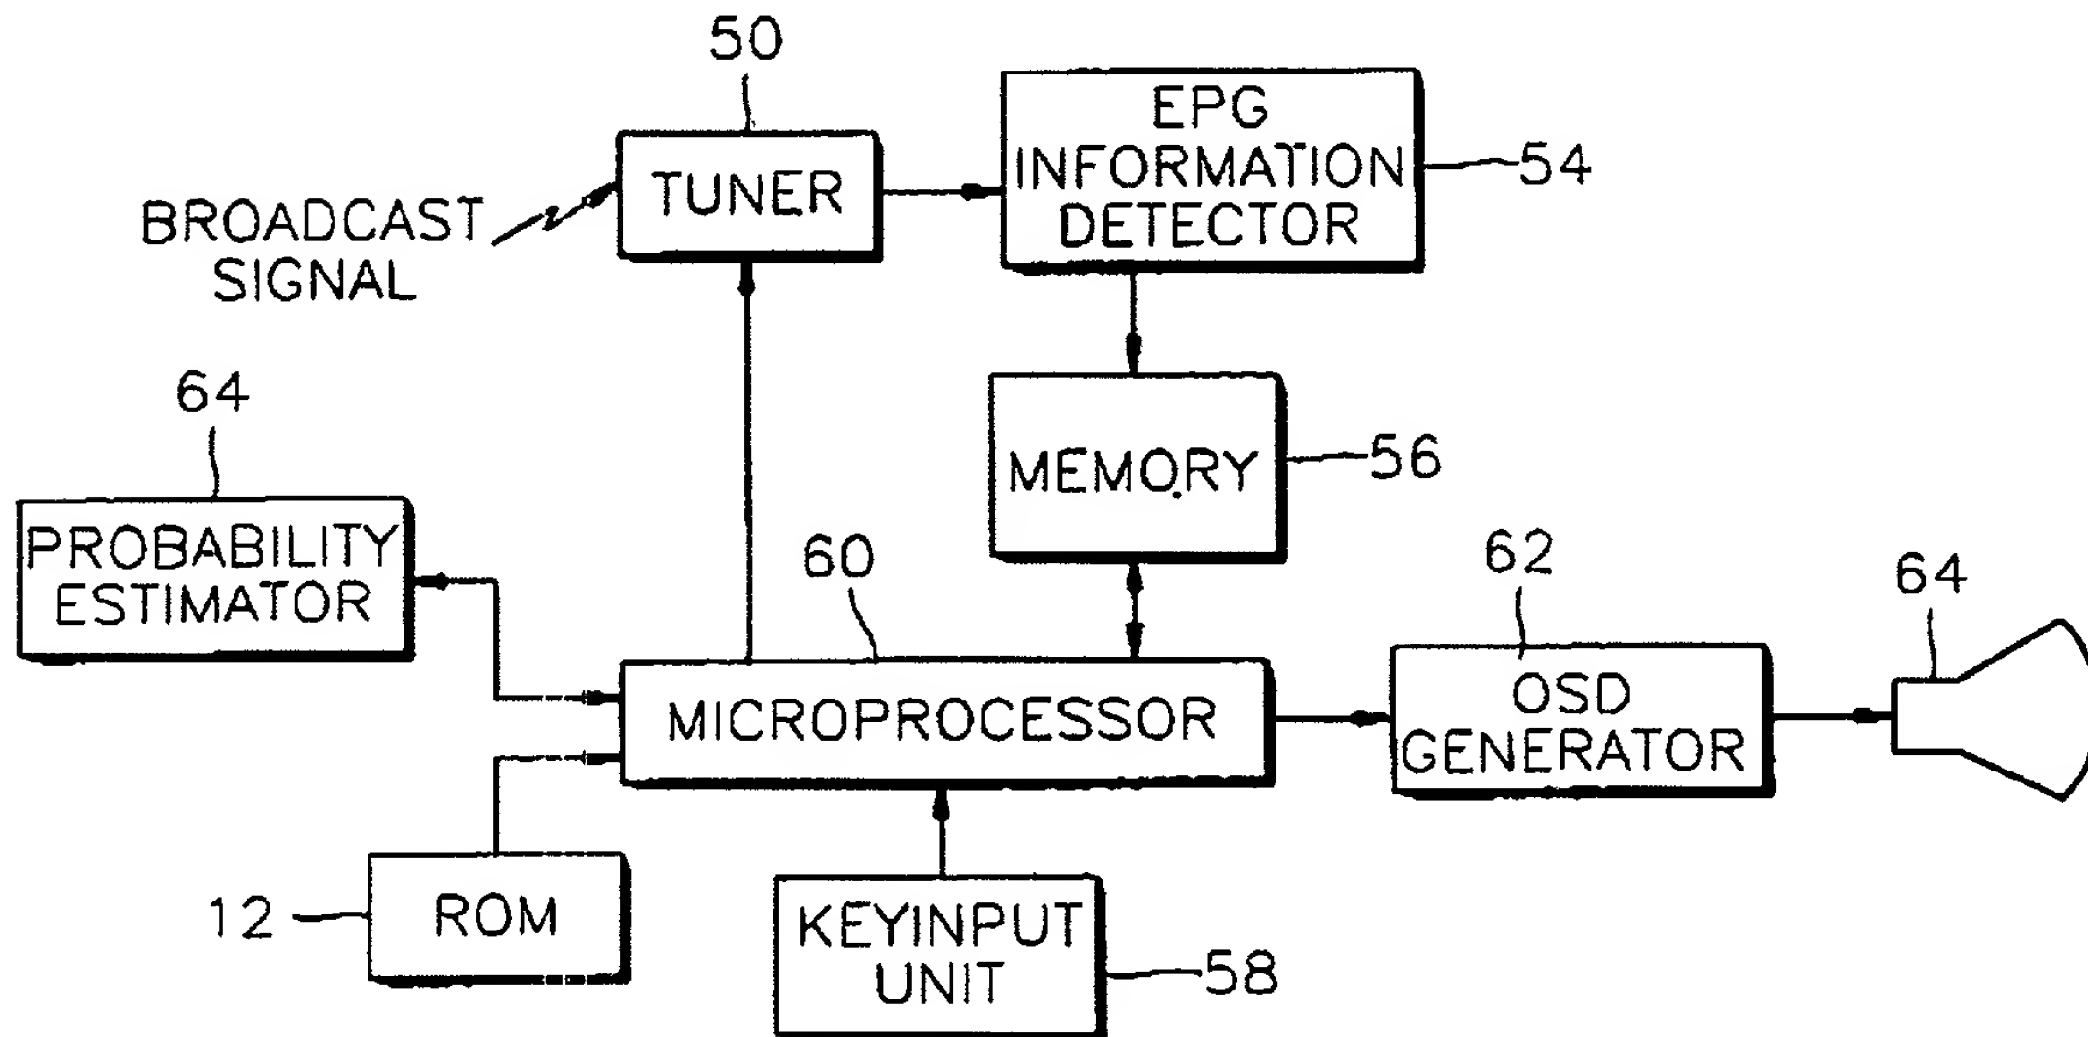

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

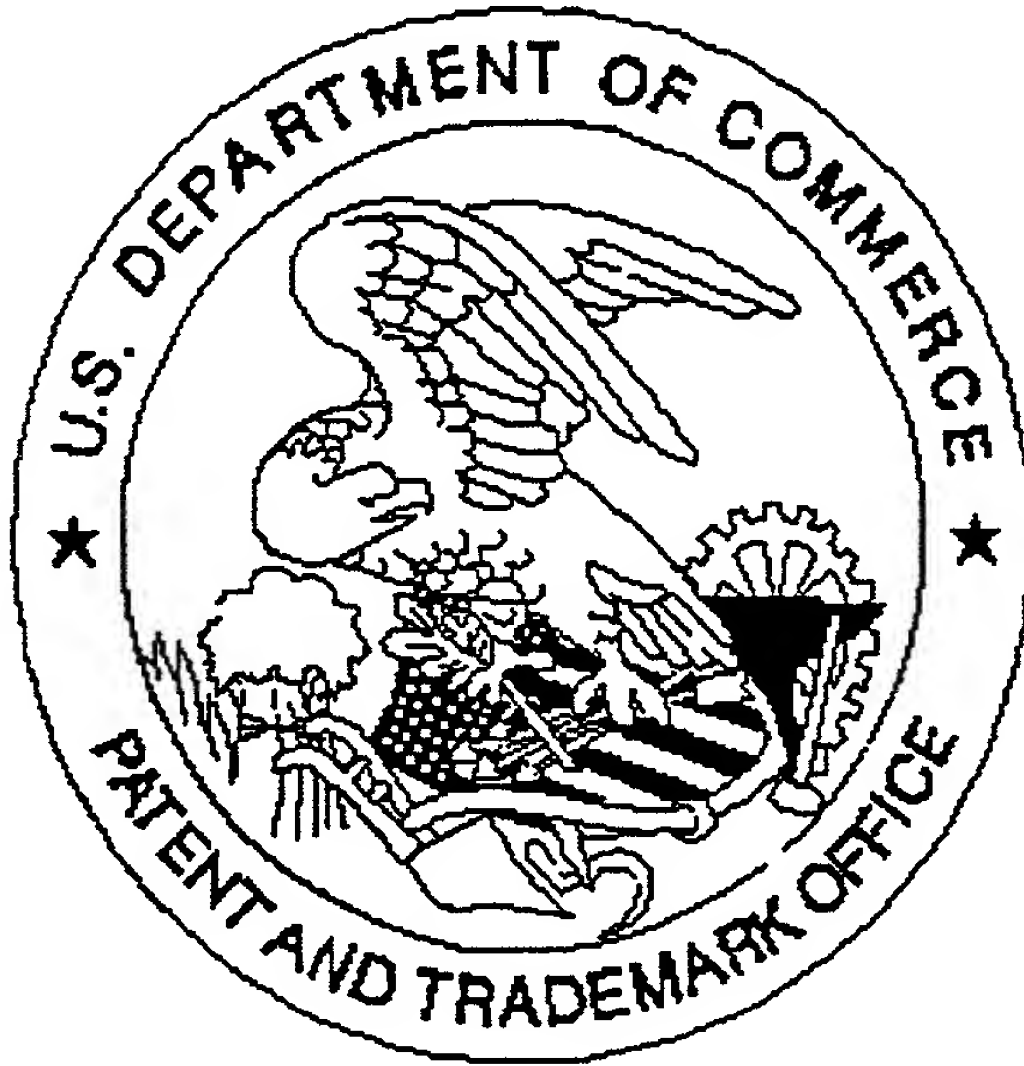

Application deficiencies were found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

No Declaration

☐ Scanned copy is best available.